



your global partner for entrance solutions



● **Austria**

Helmut Heinz Bunzl Ges.m.b.H.
record Türautomation
Zwingenstrasse 17
A-2380 Perchtoldsdorf
Tel. + 43 1 865 88 75
Fax + 43 1 865 88 75 14
e-mail: hhb@aon.at
www.record.hhb.at

● **Denmark**

record BMT A/S
Hovedstensvej 33
DK-2650 Hvidovre
Tel. + 45 36 78 23 00
Fax + 45 36 77 16 28
e-mail: salg@recordbmt.dk
www.recordbmt.dk

● **France**

record portes automatiques SAS
ZAC-6 Rue de l'Orme Saint Germain
F-91165 Champlan Cedex
Tel. + 33 1 69 79 31 10
Fax + 33 1 69 79 31 29
e-mail: record@cordver.fr
www.record-portes-automatiques.fr

● **Germany**

record Türautomation GmbH
Dieselstrasse 70
D-42389 Wuppertal
Tel. + 49 202 60 90 10
Fax + 49 202 60 90 111
e-mail: info@tuerautomation.de
www.tuerautomation.de

● **Great Britain**

record automatic doors (UK) limited
Unit 4 D, Albany Park Industrial Estate
Frimley Road, Camberley
GB-Surrey GU 16 7 QE
Tel. + 44 1276 692 999
Fax + 44 1276 692 747
e-mail: info@record-uk.co.uk

● **Hungary**

record ajtó kft
Leshegy ut 8
H-2310 Szigetszentmiklós
Tel. + 36 24 51 53 90
Fax + 36 24 51 53 92
e-mail: recordajto@recordajto.hu

● **Netherlands**

Automatische deuren record B.V.
Cardanuslaan 30
NL-6865 HK Doorwerth
Tel. + 31 26 33 99 777
Fax + 31 26 33 99 770
e-mail: info@record-automatishedeuren.nl
www.record-automatishedeuren.nl

● **Poland**

record drzwi automatyczne Sp.zo.o
Nowa 23 Street
PL-05-500 Piaseczno, Stara Iwiczna
Tel. + 48 22 73 77 100
Fax + 48 22 737 70 08
e-mail: record@record.net.pl

● **Spain**

record puertas automaticas SA
Calle Joaquin Sorolla, n°81
E 28529 Rivas Vaciamadrid
Tel. + 34 91 499 08 80
Fax + 34 91 499 12 56
e-mail: infospain@recordpuertas.es

● **Sweden**

record dörrautomatik sweden AB
Box 19006
Wedavagen 22B
S-15225 Södertälje
Tel. + 46 8 550 646 30
Fax + 46 8 550 699 20
e-mail: info@rdarecord.se
www.rdarecord.se

● **Switzerland**

record Türautomation AG
Allmendstrasse 24
CH-8320 Fehraltorf
Tel. + 41 1 954 91 91
Fax + 41 1 954 92 00
e-mail: gch@record.ch
www.record.ch

● **USA**

KM Systems Inc.
4910 Starcrest Drive (28110)
Post Office Box 3099
Monroe, NC 28111-3099
Tel. + 1 704 289 92 12
Fax + 1 704 289 20 24
e-mail: engineering@kmsystemsinc.com
www.kmsystemsinc.com

● **International**

record international sa
Allmendstrasse 24
CH-8320 Fehraltorf
Tel. + 41 1 954 91 91
Fax + 41 1 954 92 00
e-mail: exp@record.ch



● **Production**

agtatec ltd
Allmendstrasse 24
CH-8320 Fehraltorf
Tel. + 41 1 954 91 91
Fax + 41 1 954 92 00
e-mail: agtatec@record.ch

record industry SA
Z.I. les Triboulières
F-38460 Crémieu
Tel. + 33 4 74 90 52 90
Fax + 33 4 74 90 52 91
e-mail: record.industry@cordver.fr

www.agta-record.com



your global partner for entrance solutions



Automatic break-out system

record 16 TOS



The adaptable door !



record


your global partner for entrance solutions



Automatic break-out system record 16 TOS

- for use on escape and rescue routes
- for adapting pedestrian entrances into wide load access and egress

With this system it is possible to swivel the sliding door leaves and side screens through 90 degrees from any position of opening.

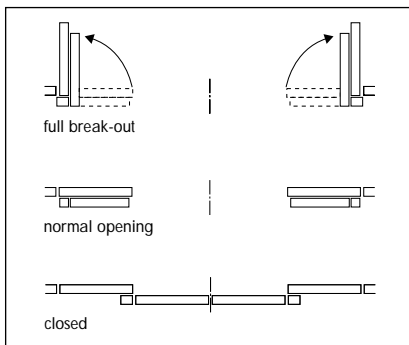

There is a special floor guide designed for silent operation mounted in the side screen area which can be recessed into the floor, this leaves an unobstructed clear opening area for pedestrian traffic. If special locking is required (locking rail, floor lock) a continuous floor rail can be mounted across the full passage width.

We recommend the break-out system **record 16 TOS** for doors on escape and rescue routes or where bulky objects or vehicles need wider entrances e.g. shopping centres, hospitals, hotels/restaurants, car showrooms, airports and railway stations.

When **record 16 TOS** is used in escape and rescue routes the surveillance device (FEM) monitors both sliding leaves and side screens, in case of misalignment an alarm signal is displayed on the electronic control or transmitted to a central control station. This guarantees a high degree of security.

The break-out system **record 16 TOS** is part of the modular record system 16. It consists of the basic operator record 16 STA and the additional **record 16 TOS** module.



always safe







Technical data

Clear opening width A	
biparting sliding door	800 - 2500 mm
single sliding door	800 - 1200 mm
Clear height of passage G	
recommended maximum height	2500 mm
Maximum weight of door leaves	
for record 16 TOS	
biparting sliding door	2 x 120 kg
single sliding door	1 x 200 kg
for record 16 TOS DUO (heavy door leaves)	
biparting sliding door	2 x 200 kg
single sliding door	1 x 200 kg
Operator dimensions, incl. casing	
height	200 mm
depth	160 mm
Opening speed, programable (1)	
biparting sliding door	0.7 m in 1.0 sec.
single sliding door	0.7 m in 1.5 sec.
Electrical connection data	
mains voltage	230 V, 50 / 60 Hz
rated power	0,6 A
rated capacity	100 W
rated capacity standby mode	14 W
fuse protection	min. 2,5 A slow

(1) if door leaf weight equals 75 % of permissible maximum weight

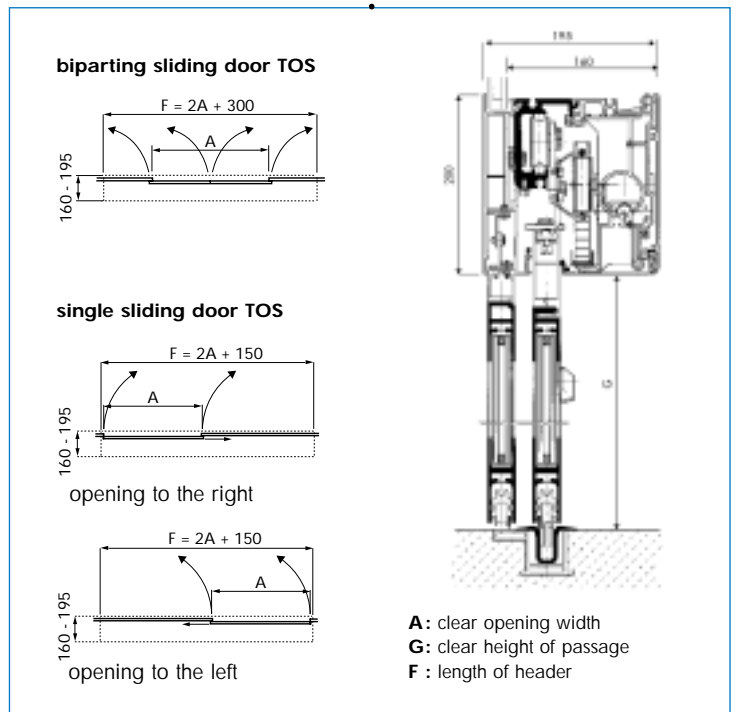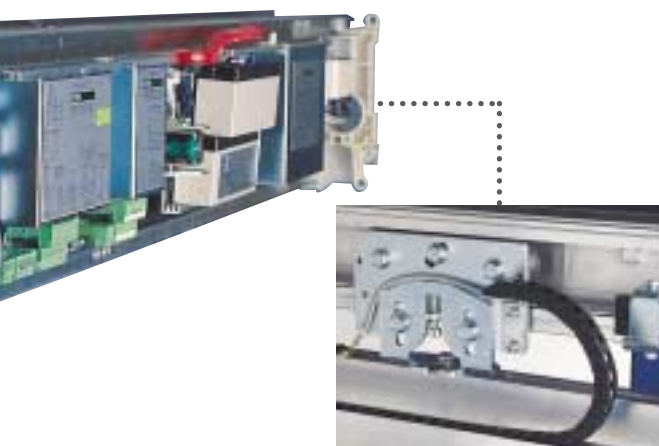

always reliable

